

# Replacement Elements - Hockey Puck

**Small FS/PS 3 - 250 SCFM Flow Range**

## Features

- High grade filter element
- Element construction of injection molded thermoplastic
- Integrated gasket seal
  - Positive seal between housing hemispheres
  - New seal with each element
  - Minimizes parts
- Optimal surface area per given size
- Pleated media for high dirt holding capacity

## Technical Specifications

- Polyester: 99+% removal efficiency standard to 10 micron
- Paper: 99+% removal efficiency standard to 2 micron
- Temp (continuous): min -15°F (-26°C), max 220°F (104°C)
- Filter change out differential: 15-20" H<sub>2</sub>O over initial ΔP




## Polyester Media Benefits/Specs

- Less maintenance due to longer durability
- Moisture resistant
- Handles hot air and oil mist from unload cycle of reciprocating/piston compressor
- Washable with lukewarm water and mild detergent (replacing element is recommended)

## Paper Media Benefits/Specs

- Heavy duty industrial strength paper
- Cost effective
- Gently blow out media (replacing element is recommended)

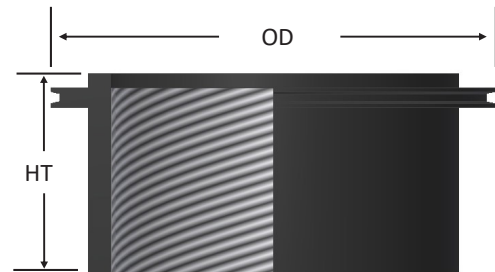

Element Part Number		Element SCFM Rating	Surface Area ft <sup>2</sup>	Dimensions - inches	
Polyester	Paper			O.D.	H.T.
03™	02™	3	0.1	1 ½	1
05™	04™	8	0.2	2 ¼	1
07™	06™	12	0.58	3	1 ⅜
11™	10™	35	1.1	4	1 ⅜
17*	16™	250	8	8	3 ¼

\*Minimum order quantity applies.

See Element Technical Data for maintenance guidelines. Contact factory for options.

Rev: US0621K

[www.solbergmfg.com](http://www.solbergmfg.com)

All model offerings and design parameters are subject to change without prior notice.  
Contact your representative or visit [www.solbergmfg.com](http://www.solbergmfg.com) for the most current information.