

Features

- Designed to replace pleated and/or fiberglass throwaway filters. Triple the service life without triple the cost
- Open weave on air entering side traps larger particles; tight weave on air exiting side captures smaller particles
- Media heat sealed around 9 gauge wire frame creating self-sealing gasket, dramatically increasing efficiency.
- Takes up 50% less space compared to standard cardboard framed filters, saving money and lessening trips by maintenance personnel to air handler
- Available in panel and link form. Link form designed for slide-in systems to ease both installation and changeout.
- Unaffected by humidity, moisture and most corrosive chemicals



Ideal for:

- Hospitals
- Schools
- Office Complexes
- Food and Pharmaceutical processing
- General commercial and industrial applications
- Airports
- Paint Booths
- Computer Rooms



Construction

- Two ply 100% 6/1 denier graduated density tackified polyester media, heat sealed around 9 gauge corrosion resistant internal wire frame

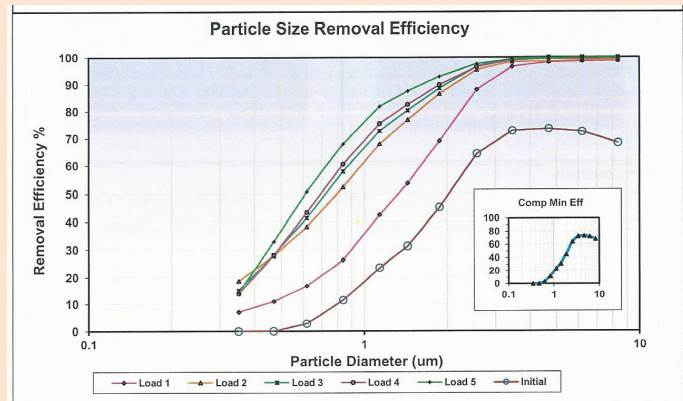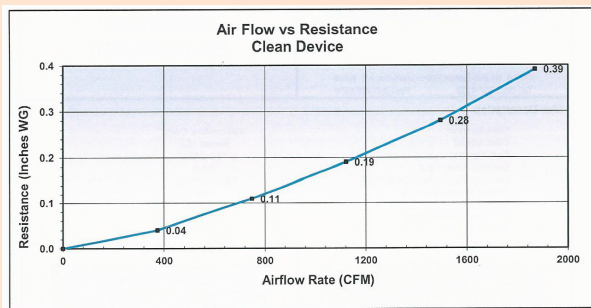

Performance Data

Rating	MERV 8 @ 1496CFM
Dust Holding Capacity	279 grams
Initial Resistance	.28 in w.g.
Final Resistance	1.5 in w.g.

Part Number Guide

Item Number	Description	Size	Units	PKG
153-002	SERIES 153 DRY TACK PANEL	20"X20"	CS	20/CS
153-003	SERIES 153 DRY TACK PANEL	20"X25"	CS	16/CS
153-120	SERIES 153 DRY TACK PANEL	20"X48"	CS	8/CS