

MC Series Melt Blown Filter Cartridges

AJR Filtration MC Series cartridges, formerly from Delta Pure Filtration, provide depth filtration with a gradient design to trap particles throughout the entire cross section of the filter. The molded core prevents collapse even if subjected to higher temperatures. The gradient density allows for optimum dirt holding capacity and minimal change outs. MC Series cartridges utilize dual micron gradients for two distinct filter zones.

MC Series cartridges are made entirely of FDA 21CFR 177.1520 compliant polypropylene which provides exceptional chemical compatibility to handle a wide range of process fluids. MC Series cartridges offer economical filtration with flow rates of up to 5 gpm per 10" length and a maximum operating temperature of 125° F. MC Series cartridges are designed for knife-edge seal housings without the use of gaskets or seals. A wide variety of end cap options are also available.



MC Series melt blown cartridge filters feature a molded core that prevents collapse even if subjected to higher temperatures

Applications

- RO Pre-filtration, DI water
- Process and potable water
- Food and beverage
- RO pre-treatment
- Chemical processing
- Groundwater remediation
- Oil and gas
- Cooling fluids
- Inks and coatings

Benefits

- Molded core for exceptional collapse strength
- FDA listed polypropylene media with wide chemical compatibility
- Easy disposal by incineration
- Free of binders, adhesives, and surfactants
- Economical depth filtration
- High dirt holding capacity
- Non-shedding media
- Graded pore construction for long on-stream life

Box Quantities by length

2-1/2" Diameter

10"	Length	30/Box
20"	Length	15/Box
30"	Length	15/Box
40"	Length	15/Box

4- 1/2" Diameter

10"	Length	12/Box
20"	Length	6/Box
30"	Length	3/Box

DELTA PURE FILTRATION IS NOW AJR FILTRATION



Specifications

Cartridge ID:

1" nominal standard

Cartridge OD:


2.5"
4.5"

Length:

Up to 40"
Special lengths available

Recommended Maximum DP:

35 PSID (2.4 bar)

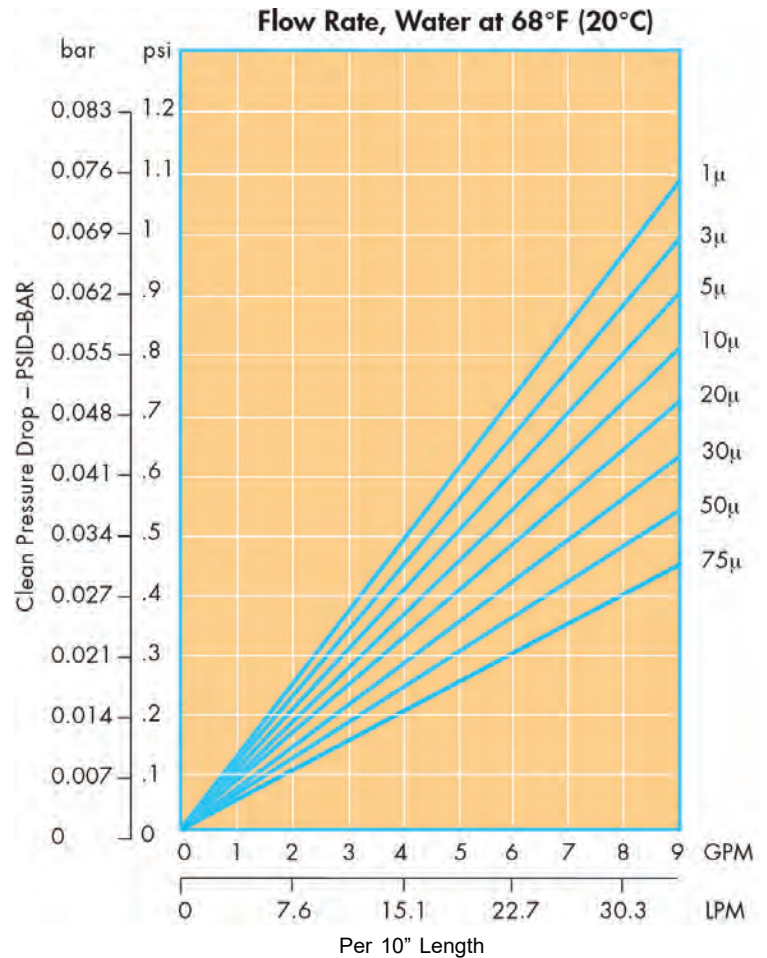

Example
MC-10-30-2SD-S

MC - 10 - 30 - [blank] - 2SD - S - ISW

Micron Rating Length Diameter Option O-ring

MC Model/Code Ordering Info

MICRON RATING	LENGTH INCHES	DIAMETER	OPTIONS	O-RINGS
1	9.75	*Blank = 2.5" OD	Blank - DOE, plain ends 2SPR - 222 w/ spring top* 2SD - 222 w/ disc* 2SF - 222 w/ fin* 6SPR - 226 w/ spring top* 6SD - 226 w/ disc* 6SF - 226 w/ fin* E - DOE, extended core GP - DOE, polyethylene gaskets (heat sealed to filter) SPR - SOE, with polypro spring SPRE - SOE, with polypro spring and extender ISW - Individually shrink wrapped ISWL - Individually shrink wrapped and labeled	Blank = Buna -E = EPDM -S = Silicone -V = Fluoroelastomer *O-Rings are only available on 222 and 226 options
3	10	*J = 4.5" OD		
5	20			
10	30			
15	40			
25				
50				
100				
		*ISW is standard		