



RTEC™ G Series Filter Cartridges

Rigid Resin Bonded Filters

Product Specifications

Media:

Microfiberglass/Phenolic Resin

Core:

Tin Coated Steel

Outer Sleeve:

Cotton

Micron rating:

1, 5, 10, 25, 50, 75, 125, 150 µm

Dimensions

Nominal lengths:

9.75", 10", 19.5", 20", 29.25", 30", 39", 40"
(24.8, 25.4, 49.5, 50.8, 74.3, 76.2, 99.1,
101.6 cm)

Outside diameter: 2.6" (66 mm)

Inside diameter:

1" (25.4 mm) tapered

Operating Parameters

Maximum operating temperature:*

150 psid @ 200°F (10 bar 93°C)
50 psid @ 375°F (3.4 bar 190°C)

**Recommended change-out
pressure:** 35 psid (2.4 bar)

*Always check compatibility with the
specific process fluid at the specific
application temperature.

RTEC G Series filters feature a microfiberglass/phenolic resin construction that produces an extremely rigid pore structure. This construction allows the filter to withstand extremes of viscosity and temperature without compression or collapse. In addition, a true graded density construction allows complete utilization of the filter's depth, with coarse particles captured in the outer zones and finer particles captured nearer the core.

FEATURES & BENEFITS

- Rigid microfiberglass/phenolic resin construction prevents unloading even at high differential pressures
- Grooved outer surface increases surface area for longer on-stream life
- Available in a wide range of removal efficiencies from 0.5 to 150 microns
- Broad chemical compatibility
- Provided with outer cotton wrap to aid in handling and protect the surface

TYPICAL APPLICATIONS


- Paints, Inks
- Sealants
- Adhesives
- Lacquers, Varnishes, Shellacs
- Fuel Oils, Crude Oils, Grease
- Machine Coolants
- Silicones
- Antifreeze
- Plasticizers
- Animal Oils

RTEC G NOMENCLATURE INFORMATION

Product Series	Retention Rating (microns)		Length (inches)		End Configuration	Gasket or O-Ring	Option
RTEC G Series	1	50	-9.75	-29.25	N None	N None	-R 304SS Core
	5	75	-10	-30			
	10	125	-19.5	-39			
	25	150	-20	-40			
Example: RTEC G 5-20NN							
RTEC G	5		-20		N	N	

RTEC G FLOW RATE

**Typical Flow Rate Clean Water at Ambient Temperature
(per 10" cartridge)**

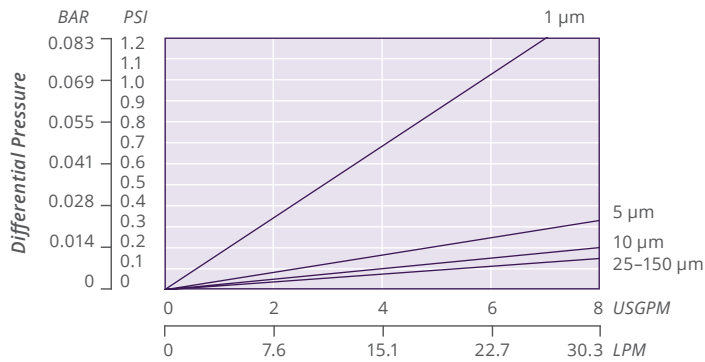

For liquids other than water, multiply pressure drop by the fluid viscosity in centipoise

For chemical compatibility, flow rates, and temperature requirements please consult the factory or your local Graver distributor.

FOR MORE INFORMATION

GTX-340 12-24

DISTRIBUTED BY

Customer Service/Technical Support: 1-888-353-0303

China: +86-21-5238-6576 Asia: +65-9671-9966

All information and recommendations appearing in this bulletin concerning the use of products described herein are based on tests believe to be reliable. However, It is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Graver Technologies as to the effects of such use or the results to be obtained. Graver Technologies assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations. RTEC is a trademark of Graver Technologies, LLC.



Graver Technologies | 200 Lake Drive, Glasgow, DE 19702 | 1-302-731-1700 | 800-249-1990

Fax: 1-302-369-0938 | info@gravertech.com | www.gravertech.com

A member of The Marmon Group—A Berkshire Hathaway Company