


MATERIALS OF CONSTRUCTION				
END CAP, O-RING INSERT & CENTERTUBE	CORROSION RESISTANT STEEL			
ADHESIVE	URETHANE			
COALESCER MEDIA	POLYPROPYLENE & COTTON			
O-RING SEAL	VITON			

PERFORMANCE	
CLEAN PRESSURE DROP (DM620-00-C)	27 INCHES WATER @ 50 CFM
CLEAN PRESSURE DROP (DM639-00-C)	27 INCHES WATER @ 100 CFM
CLEAN PRESSURE DROP (DM612-00-C)	27 INCHES WATER @ 30 CFM
EFFICIENCY	99.9% TOTAL EMISSIONS
CARRYOVER	LESS THAN OR EQUAL TO 5 PPM
EXPECTED LIFE	2 YEARS
DISPOSAL	NORMAL OIL FILTER
MAXIMUM OPERATING TEMPERATURE	250°F
LIQUID LOADING	5000 MILLIGRAM/CUBIC METER

MODEL NUMBER	"A"	"B"
DM620-00-C	19 1/4	6
DM639-00-C	38 1/8	6
DM612-00-C	11 7/8	6

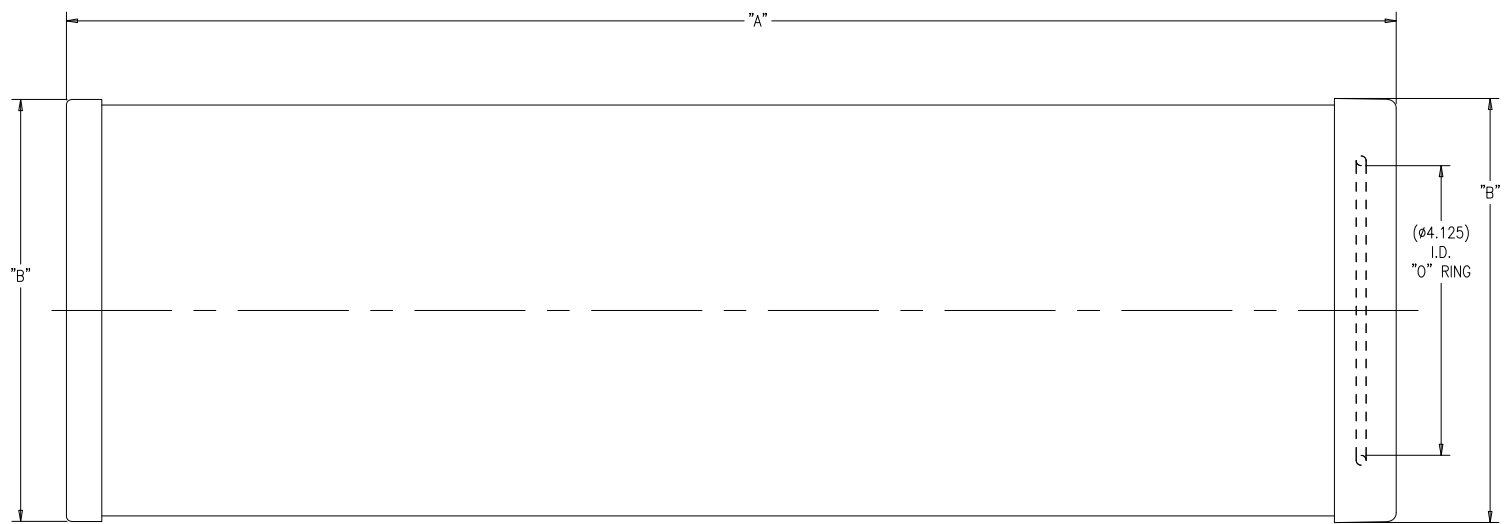

NOTE:  
USE PARKER SUPER O-LUBE ON "O" RING BEFORE INSTALLING IN VESEL.

REV	DESCRIPTION	BY	DATE	APP
C	ADDED "CLEAN"	ML	4/01	ML
B	B1 WAS 18.875/18.750 B2 WAS BUNA-N B3 WAS @ .3 MICRON B4 WAS 180°F	SPB	3/30/99	GLF
A	WAS 150 CFM	GF	12/14/95	GLF

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE WITHOUT WRITTEN PERMISSION FROM THE HILLARD CORP. © COPYRIGHT THE HILLARD CORPORATION, ALL RIGHTS RESERVED. MAKE FROM		UNLESS OTHERWISE SPECIFIED: FINISH: <input checked="" type="checkbox"/> MILLING BREAK CORNERS: $\frac{015}{16}$ MAX	<b>Hillard</b> THE HILLARD CORPORATION 100 WEST FOURTH STREET ELMIRA, NEW YORK 14902 HILLARD IS AN ISO 9001 REGISTERED COMPANY	DRAWING STATUS DRAWN: GF 8/24/95 CHECKED: GLF 8/24/95 APPROVED: JMB 8/31/95	<b>PRODUCTION</b> TITLE: DATA SHEET DM620/DM639 DEMISTER CARTRIDGES SHEET 1 OF 1 DD-702-3
--	--	---	--	--	--

F | E | D | C | B | A