


F | E | D | C | B | A

4 | 4

3 | 3

2 | 2

1 | 1

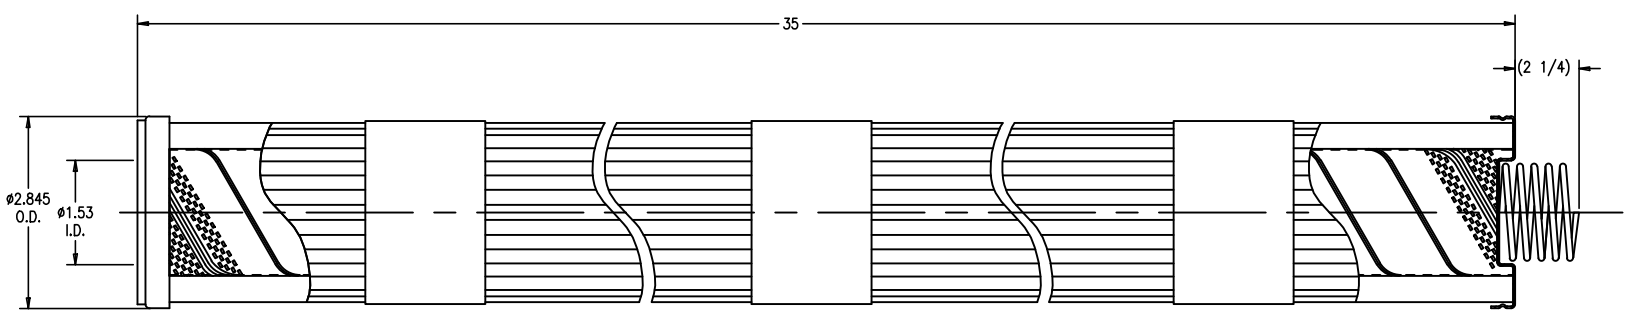

- PHYSICAL CHARACTERISTICS:
1. CORROSION RESISTANT METAL END CAPS & CENTERTUBE.
 2. BUNA-N GASKET
 3. MEDIA TYPE: CELLULOSE BLEND
 4. MAXIMUM OPERATING TEMPERATURE 250°F.
 5. 100 PSI COLLAPSE STRENGTH.
 6. FILTRATION RATING: 99% EFFICIENT AT 10 MICRON

THE INFORMATION AND DATA CONTAINED HEREIN CONFORMS TO ASME Y14.5-M 1994

DRAWING STATUS
PRODUCTION

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE WITHOUT WRITTEN PERMISSION FROM THE HILLARD CORP. © COPYRIGHT THE HILLARD CORPORATION, ALL RIGHTS RESERVED. NAME FROM:	UNLESS OTHERWISE SPECIFIED FINISH: <input checked="" type="checkbox"/> NONE	THE HILLARD CORPORATION 100 WEST FORTYTH STREET ELMA, NEW YORK 14822 HILLARD ASSESSMENT T 1	DRAWN BY: ROC DATE: 06/09/21	TITLE 3830-11-138 PLEATED INDUSTRIAL CARTRIDGE
	UNLESS OTHERWISE SPECIFIED BREAK CORNERS: <input type="checkbox"/> SHARP		CHECKED BY: LTH DATE: 06/09/21	
	UNLESS OTHERWISE SPECIFIED DIMENSIONS: - .015 IN TOLERANCES: - .015 IN ANGLES: - .015 IN		APPROVED BY: LTH DATE: 06/09/21	
	SIMILAR TO:		SCALE: 3/4	
			SHEET 1 OF 1	DD-700-857 C

F | E | D | C | B | A